

## BUFFER TANK HYDRAULIC SEPARATOR

ASME SECTION VIII CONSTRUCTION

CAPACITIES FROM 120 - 1,000 GALLONS

AUTOMATIC AIR VENT

FIVE YEAR LIMITED WARRANTY



DESIGNED ★ ENGINEERED ★ ASSEMBLED

# USA



## WHAT IS A BUFFER TANK/HYDRAULIC SEPARATOR?

A Buffer Tank/Hydraulic Separator is designed to maximize the runtime and limit the on/off cycling of a boiler while separating the boiler flow from the system flow. In applications where the minimum system load is less than the minimum output of the boiler there is a high propensity for the boiler to excessively cycle on and off due to the fact that the boiler is delivering more BTU's than the system is requiring. In this case the Buffer Tank is designed to act as a battery for BTU's. The system demand is met by using BTU's that are already stored in the tank and thus delaying the boiler from initiating a heating cycle until a minimum run time can be accomplished.

The Hydraulic Separator aspect of the tank is designed to de-couple the hydronic heating system flow from the boiler flow by acting as a "separator" so that the two independent flows do not affect one another. When the system flow is less than the minimum required boiler flow there will likely be erratic system delivery temperatures and excessive boiler cycling. These adverse affects can cause premature component failure, and in most cases, boiler efficiency will be adversely affected.

## WHEN SHOULD A BUFFER TANK/HYDRAULIC SEPARATOR BE APPLIED?

A Buffer Tank/Hydraulic Separator can be applied to keep the boiler from short cycling in situations where the smallest building demand is less than the minimum rated output of the boiler and/or in situations where system flow is less than the flow required by the boiler.

For example, assume that during a warm spring day there is only a fractional demand for heat where the actual demand is 50,000 BTU/Hr., but the boiler cannot deliver less than 150,000 BTU/Hr at its lowest output. On days that meet this criteria the boiler will cycle excessively because more BTU's are being produced than the distribution system can transfer to the building. A properly sized buffer tank in this situation will limit the number of boiler "on/off" cycles and increase the comfort level of the building by delivering a more constant temperature.

Additionally, during these days of fractional demand the system flow may be less than the boiler flow due to system pumps slowing because the demand is less than the design load. In this case the Hydraulic Separator acts as a decoupling device and the decreased system flow will not affect the operation of the boilers. By effectively separating the system flow from the boiler flow, a more constant delivery temperature, as well as longer boiler operational cycles, can be achieved. Reducing boiler on/off cycles will increase boiler efficiency and reduce maintenance costs.



## HOW IS A BUFFER TANK/HYDRAULIC SEPARATOR SIZED?

A Buffer Tank/Hydraulic Separator is sized to provide a minimum runtime for the boiler plant. Use the equation below to find the properly sized tank for your specific application. Tank connection diameters should be sized to meet the maximum flow requirements of the application.

$$\text{Buffer Tank Capacity} = \frac{\text{Desired Run Time} \times (\text{Minimum Boiler Output} - \text{Minimum System Load})}{\text{System } \Delta T \times 8.33 \times 60}$$

- Desired Runtime- The Minimum period of time that the boiler should run before cycling off.  
-Lochinvar recommends a minimum boiler runtime of no less than 10 minutes.
- Minimum Boiler Output- The amount of BTU's that will be delivered at the minimum firing rate of the smallest boiler in the plant.
- Minimum System Load- The absolute smallest heat demand of the building.
- System Delta T- The difference between the system supply temperature and system return temperature.
- 8.33- The weight of one gallon of water.
- 60- The number of minutes in 1 hour



## WHAT WILL THE LEAVING WATER TEMPERATURE BE FROM THE BUFFER TANK/HYDRAULIC SEPARATOR?

At times when the system flow is greater than the boiler flow the system supply temperature can be less than the boiler supply temperature due to the mixing of the temperatures in the tank. The exact system supply temperature can be found by using the formula in Figure 1 (right). This can be helpful when calculating system supply temperatures during high load periods.


## WHAT HAPPENS INSIDE THE BUFFER TANK/HYDRAULIC SEPARATOR?

Depending on the relationship between the system flow and boiler flow, the buffer tank may react in different ways. Find your specific situation in the diagrams below and see the associated flow and thermal distribution patterns inside the Buffer Tank/Hydraulic Separator. As the diagrams show, the design allows for the boiler flow and system flow to work together to maximize boiler efficiency and overall system performance.


Figure 1

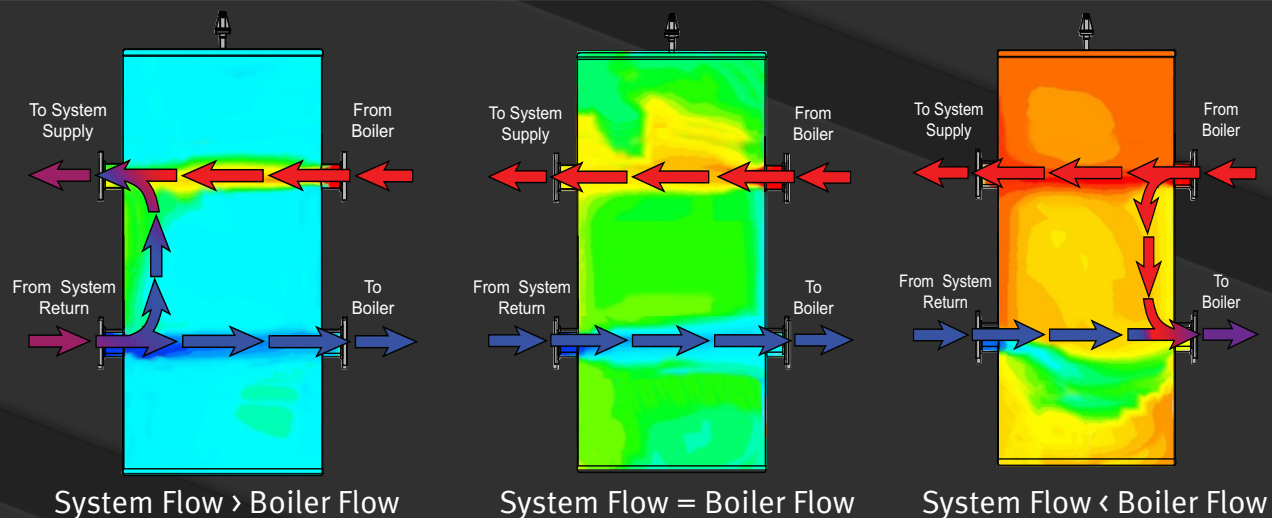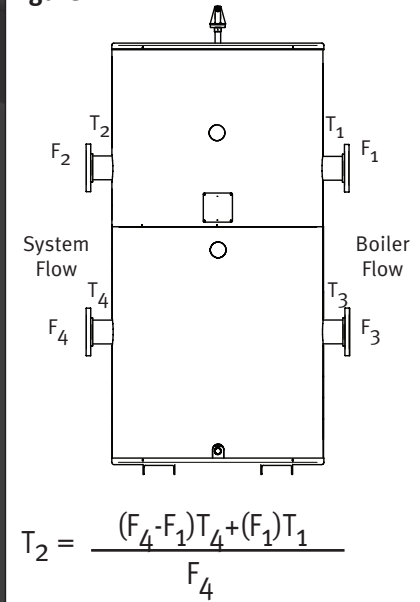

## TYPICAL PIPING ARRANGEMENT FOR BUFFER TANK/HYDRAULIC SEPARATOR IN HYDRONIC SYSTEMS

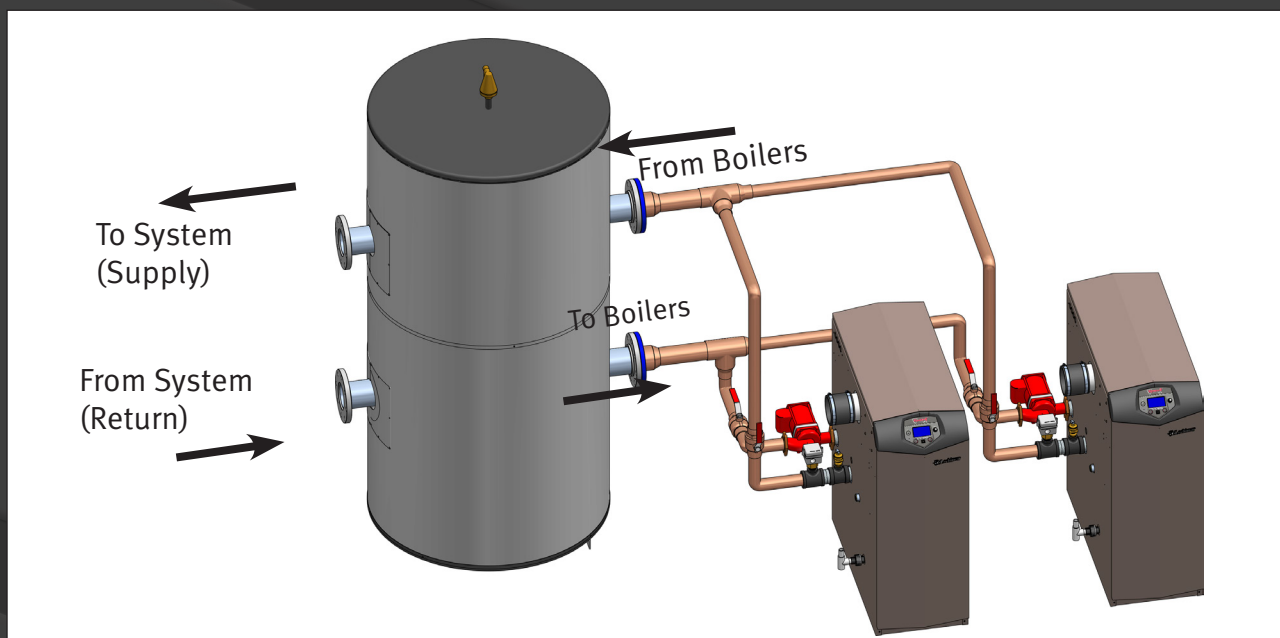

# BUFFER TANK / HYDRAULIC SEPARATOR DIMENSIONS AND SPECIFICATIONS

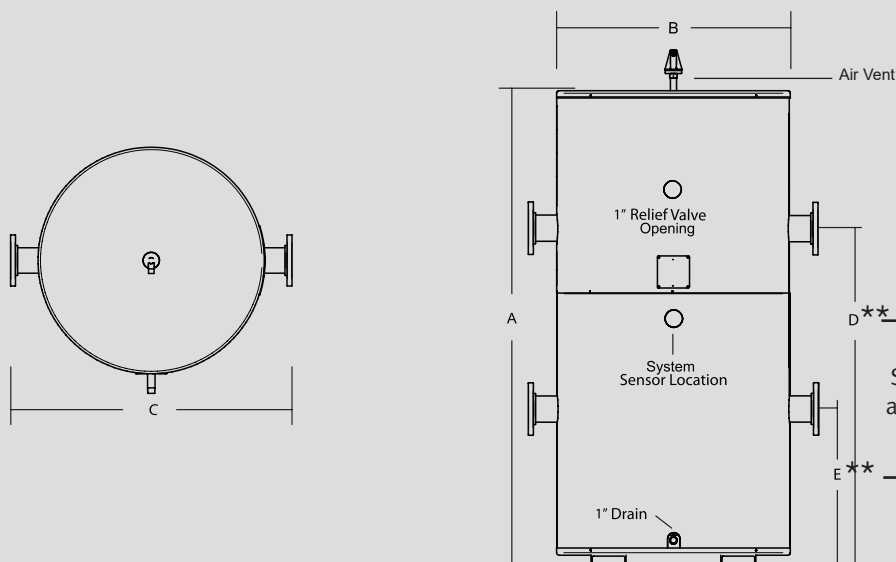

\*\*If non-standard Supply/Return connections are selected, consult factory for specific dimensions

## BVU MODELS DIMENSIONS AND SPECIFICATIONS

Model Number	Gallon Capacity	A	B	C	D**	E**	Standard Conn. Size	Shipping Wt. (lbs.)
BVU120*	120	59-1/2"	32"	NA*	43-3/4"	19-3/4"	3" NPT*	500
BVU200*	200	89-1/2"	32"	NA*	73-3/4"	19-3/4"	3" NPT*	900
BVU300	300	80"	40"	50"	57-1/2"	26-1/2"	4" Flange	1,290
BVU400	400	80"	46"	56"	55"	29"	6" Flange	1,626
BVU500	500	91"	46"	56"	66"	29"	6" Flange	1,765
BVU750	750	104"	52"	62"	77"	31"	6" Flange	2,330
BVU1000	1,000	128"	52"	62"	101"	31"	6" Flange	3,010

Notes: \* BVU120 and BVU200 - Standard 3" Female NPT Connections that are flush with the jacket.

Custom Sizes and Configurations are Available. Consult Factory for details.

Additional Recirculation & Supply Return Connections Sizes Available. Consult Factory for details.

Lochinvar does not recommend pre-piping any system based on general reference documentation.

### STANDARD EQUIPMENT

ASME Sec. VIII U Stamp  
125psi (Max. Allowable Working Pressure)  
Automatic Air Vent  
5 Year Limited Warranty  
Pre-painted Jacket  
2" HCFC Free Foam Insulation

### OPTIONAL EQUIPMENT

Temperature Gauge  
Pressure Gauge  
Handhole  
Manway (300 gallons and larger)  
Custom Tapping Locations  
Custom Tapping Diameters  
Extra Tappings  
Custom Tank Sizes  
Flange or NPT Connections  
Relief Valve (Shipped Loose)  
Lifting Lugs (Standard on BVU750 & BVU1000)

### Model Number Guide

B	V	U	120
Model	Configuration	Tank Lining	Gallon Capacity

Buffer Tank,

Vertical,

Unlined,

120 Gallons

For technical information call 800-722-2101.  
Lochinvar LLC reserves the right to make product changes or improvements without prior notice.  
Dimensions are approximate and should not be used for construction purposes.



Lochinvar, LLC  
300 Maddox Simpson Parkway  
Lebanon, Tennessee 37090  
P: 615.889.8900 / F: 615.547.1000  
f in YouTube Lochinvar.com

