



Lochinvar®
HIGH EFFICIENCY BOILERS & WATER HEATERS

**SUN SAVER SOLAR
WATER HEATER
Submittal Sheet**

SO-Sub-08b

SUN SAVER SOLAR WATER HEATERS

JOB NAME _____
LOCATION _____
ENGINEER _____
WHOLESALE _____
MECH. CONTRACTOR _____
MODEL NO. _____
RECOVERY RATE IN GPH _____ **@** _____ **°F RISE**
GALLON CAPACITY _____
VOLTAGE/PHASE _____
KW _____
NOTES


Standard Features

- Non-CFC Foam Insulation
- Glass-Lined Steel Tank
- Tank Saver Anode
- Side Relief Valve Tapping
- Immersion Type Heating Element
- 300 psi Test Pressure, 150 psi working pressure
- 6 Year Limited Tank and Parts Warranty*
(See warranty for details)

Optional Equipment

Place an X in the box by all options that apply
10 Year Extended Warranty Kit
residential applications only

Dimensions and Specification

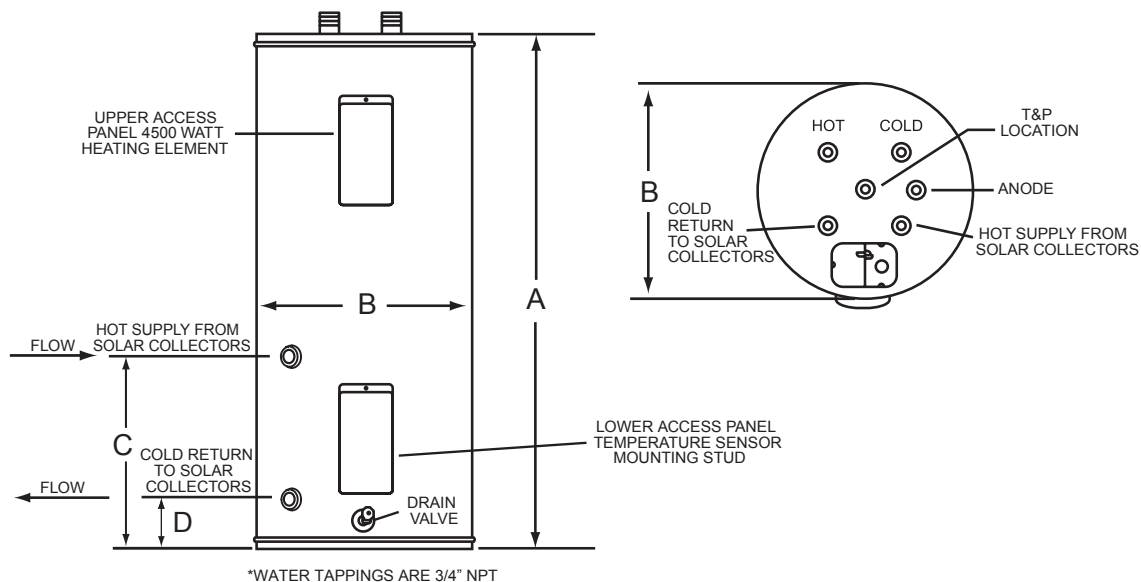

Model Number	Gallon Capacity	Element Wattage	GPH@ 90°F Rise	A	B	C	D	Shipping Weight
FTA066KS	65	4500	21	60-1/4"	22"	20-1/2"	7-1/2"	152
FTA080KS	80	4500	21	63-1/4"	24"	35-3/4"	5-1/4"	204
FTA119KS	119	4500	21	63-1/4"	28"	35-3/4"	5-1/4"	311

Notes: Voltage and wattage; 240V 1Ø - 4500W.