



Lochinvar®

LIGHT DUTY CHARGER COMM. GAS WATER HEATER

Submittal Sheet

CGLD-Sub-05

Job Name:

Model No.:

BTU/hr INPUT:

Location:

Type Gas:

Recovery Rate in GPH @ F° Rise:

Engineer:

Capacity (gal.):

Equipment Tag(s):



Agent/Wholesaler:

Contractor:

NOTES:

Standard Equipment:

- Meets ASHRAE Energy Efficiency Standards
- 80% Thermal Efficiency
- Single-Flue Design
- Glass Lined Tank
- 150 psi Working Pressure
- Tank Saver Anode
- ASME Temperature & Pressure Relief Valve
- Automatic Reset High Limit
- Electronic Gas Valve
- 180°F Operation Approved
- Combustible Floor Approved
- Steel Jacket with Foam Insulation
- Hand Hole Cleanout
- Rated up to 7,700 Ft. Altitude
- 3 Year Limited Warranty (*See warranty for details*)

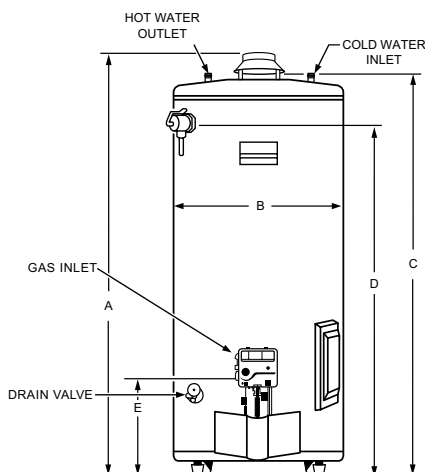

Model Number	Btu/Hr Input	Capacity (Gals.)	GPH @ 100°F Rise	A	B	C	D	E	Gas Conn.	Water Conn.	Vent Size	Ship. Wt.
CGN055 060	60,000	55	58	59-3/4"	24"	55-1/4"	48"	13-1/2"	1/2"	3/4"	4"	185
CGN075 075	75,100	74	73	62"	26-1/2"	58-1/2"	50-1/4"	14"	1/2"	1"	4"	275
CGN075 100	75,100	98	73	70"	27-3/4"	66-1/4"	50-1/4"	13-3/4"	1/2"	1-1/4"	4"	350

In the model number, "N" indicates natural gas; replace "N" with "L" to indicate L.P. gas models. CGL075 75 and CGL075 100 are rated at 55,000 Btu/hr.