

COMMERCIAL WATER HEATERS

Lochinvar's 66, 80 and 119 gallon light service electric water heaters.

LIGHT SERVICE ELECTRIC MODELS

STANDARD FEATURES

SIMULTANEOUS WIRING - Wired for simultaneous operation standard. Field convertible to non-simultaneous operation.

GLASS-LINED STEEL TANK - The durable glass lining is fused to the tank at 1600°F to assure lasting protection against rust and corrosion while providing clean, clear hot water. 300 psi test pressure provides 150 psi working pressure.

NON-CFC FOAM INSULATION - Superior material formulation provides uniform tank coverage with a thick blanket of insulating foam. This non-CFC polyurethane closed cell foam minimizes standby losses and maximizes heat retention.

ADJUSTABLE THERMOSTATS - The 120°F to 181°F control provides an easy way to reset water temperature for best economy.


AUTOMATIC OVERHEAT PROTECTION - Provides automatic overheat safety control with manual reset high limit feature.

TANK SAVER ANODE - A large diameter, high capacity anode inhibits corrosion of the tank interior for long, trouble-free service.

ASME TEMPERATURE & PRESSURE RELIEF VALVE - Factory installed.

6-YEAR LIMITED TANK WARRANTY, 1-YEAR LIMITED PARTS WARRANTY - See warranty for details.



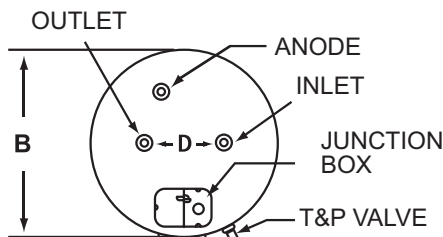

L	S	T	82	W	R
LIGHT	SERVICE	TALL	GALLON	VOLTAGE	WATTAGE

LIGHT SERVICE ELECTRIC MODELS				DIMENSIONS AND SPECIFICATIONS				
Model Number	Gallon Capacity	Voltage	Element Wattage	A	B	C	D	Shipping Weight
LST-66 WR	66	277V	6,100	60-1/4"	22"	53"	8"	146
LST-82 WR	80	277V	6,100	60-1/2"	24"	52-1/4"	8"	175
LST-119 WR	119	277V	6,100	61-1/2"	28"	54-1/2"	8"	268

Element	Recovery Rate (GPH @ °F Rise)				
Wattage	40°F	60°F	80°F	100°F	120°F
Non-Simultaneous					
6100 watt	62	42	31	25	21
Simultaneous					
12200 watt	126	84	63	50	42



(Website update 7/24)–Printed in U.S.A.