



Lochinvar®

OUTDOOR HEAT PUMP STORAGE TANK

Submittal Sheet

HPTO-Sub-01

OUTDOOR THERMAL-STOR STORAGE TANK

Job Name: _____

Model No. _____

Location: _____

Gal. Capacity: _____

Engineer: _____

Equipment Tag(s): _____

Agent/Wholesaler: _____

Contractor: _____



NOTES:

Model Number	Rated Capacity (Gal)	A	B	C	D	Shipping Weight
HP250-0	250	97-1/2"	38"	17-1/2"	92"	1,180
HP500-0	450	98"	50"	20-1/2"	92"	1,726
HP750-0	650	136"	50"	22-3/4"	130-1/4"	1,726
HP1000-0	850	137"	56"	24-3/4"	131-1/4"	3,458

*Note: Standard Construction Only - Options not available.

STANDARD FEATURES

Patent pending baffle design
 Industry leading water stratification
 95% Drawdown
 Single Pass application
 125 PSI Working Pressure
 12"x16" Manway
 Glass Lining
 R22 Insulation
 3" Flanged Connections
 Lifting Lugs
 "Seismic Rated (Condition 5, Ground Level)"
 Ten-Year Limited Warranty (See warranty for details)

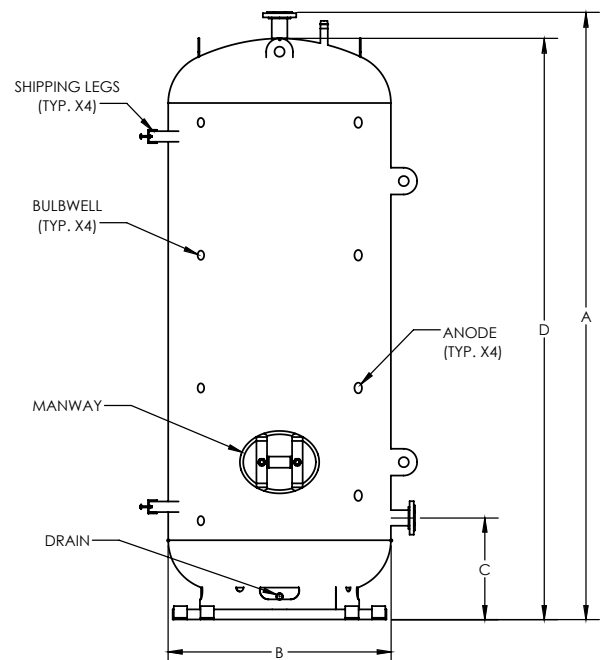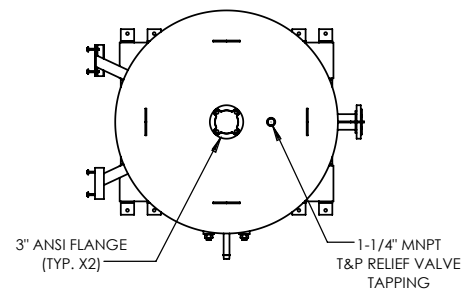

Lochinvar, LLC
 300 Maddox Simpson Parkway
 Lebanon, Tennessee 37090
 P: 615.889.8900 / F: 615.547.1000
 Lochinvar.com



LOW LEAD CONTENT

HLW