

LOCK-TEMP STAINLESS STEEL STORAGE TANKS

ENERGY-SAVING PERFORMANCE

60, 80 AND 119-GALLON CAPACITIES

EXPANDED FOAM INSULATION

DIFFUSER TUBE FOR 80% DRAW FACTOR



DESIGNED ★ ENGINEERED ★ ASSEMBLED


USA



Lochinvar®

HIGH EFFICIENCY BOILERS & WATER HEATERS

DIMENSIONS AND SPECIFICATIONS

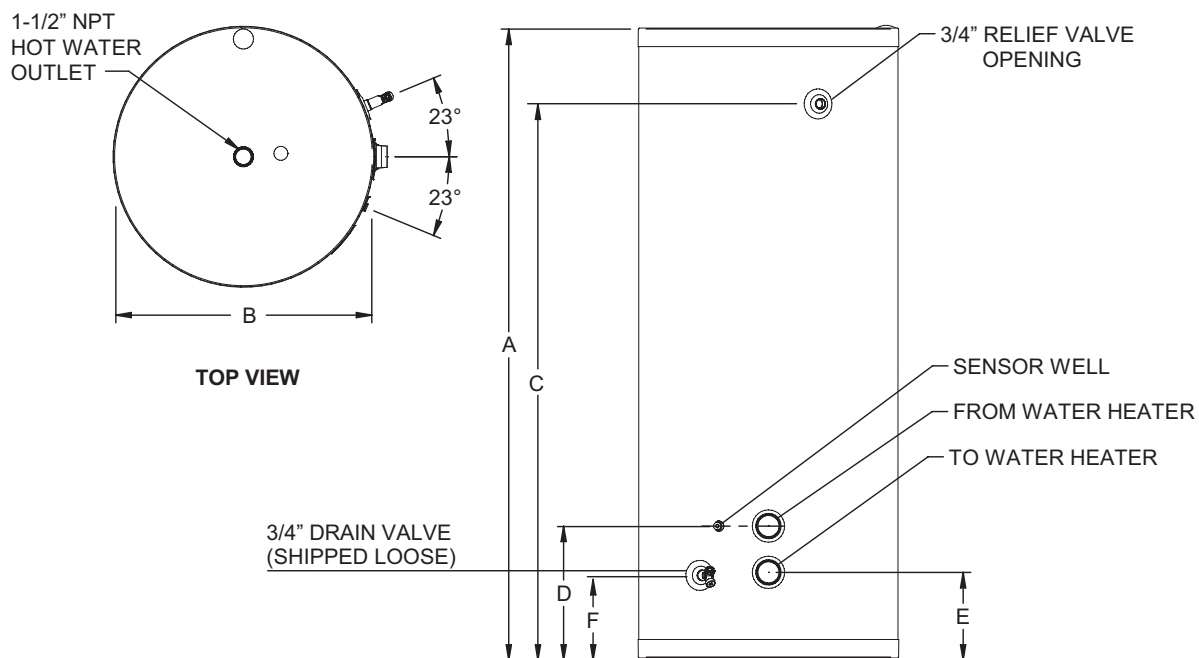

LOCK-TEMP TANK		DIMENSIONS AND SPECIFICATIONS							
Model Number	Gallon Capacity	A	B	C	D	E	F	Recirculation Tappings	Shipping Wt. (lbs.)
SJS060	60	36"	28"	28"	14-1/4"	9-1/4"	9"	1-1/2"	138
SJS080	80	69-1/2"	24"	61-3/4"	14-1/4"	9-1/4"	9"	2"	153
SJS119	119	68-1/4"	28"	60-1/4"	14-1/2"	9-1/2"	9"	2"	198

STANDARD FEATURES





Light-weight 316L stainless steel tank construction
Diffuser tube to reduce turbulence and increase stratification
150 PSI working pressure
Exceeds ASHRAE Energy Efficiency Standards
Textured, impact resistant polypropylene jacket
Bulbwell for control sensor
3/4" brass drain valve
10 year limited tank warranty

All models standard with a 10 year Limited Warranty against tank failure.

For technical information call 800-722-2101. Lochinvar, LLC reserves the right to make product changes or improvements without prior notice.



Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000

    **Lochinvar.com**