



Lochinvar[®]
HIGH EFFICIENCY BOILERS & WATER HEATERS

**LOCK-TEMP[®] STAINLESS
STEEL STORAGE TANK**

Submittal Sheet

LTS-Sub-01

LOCK TEMP STAINLESS STEEL STORAGE TANKS

JOB NAME _____

LOCATION _____

ENGINEER. _____

WHOLESALE _____

MECH. CONTRACTOR _____

MODEL NO. _____

GALLON CAPACITY _____

WORKING PRESSURE _____

DIMENSIONS _____

LINING _____

NOTES

Standard Features

- Light-weight 316L stainless steel tank construction
- Diffuser tube to eliminate turbulence
- 150 PSI working pressure
- Exceeds ASHRAE Energy Efficiency Standards
- Textured, impact resistant polypropylene jacket
- Bulbwell for control sensor
- 3/4" Brass drain valve
- 10 year limited tank warranty


Optional Equipment:

Place an X in the box by all options that apply

125 PSI Temperature and Pressure Relief Valve

150 PSI Temperature and Pressure Relief Valve

Lock-Temp® Stainless Steel Storage Tanks Dimensions & Specifications

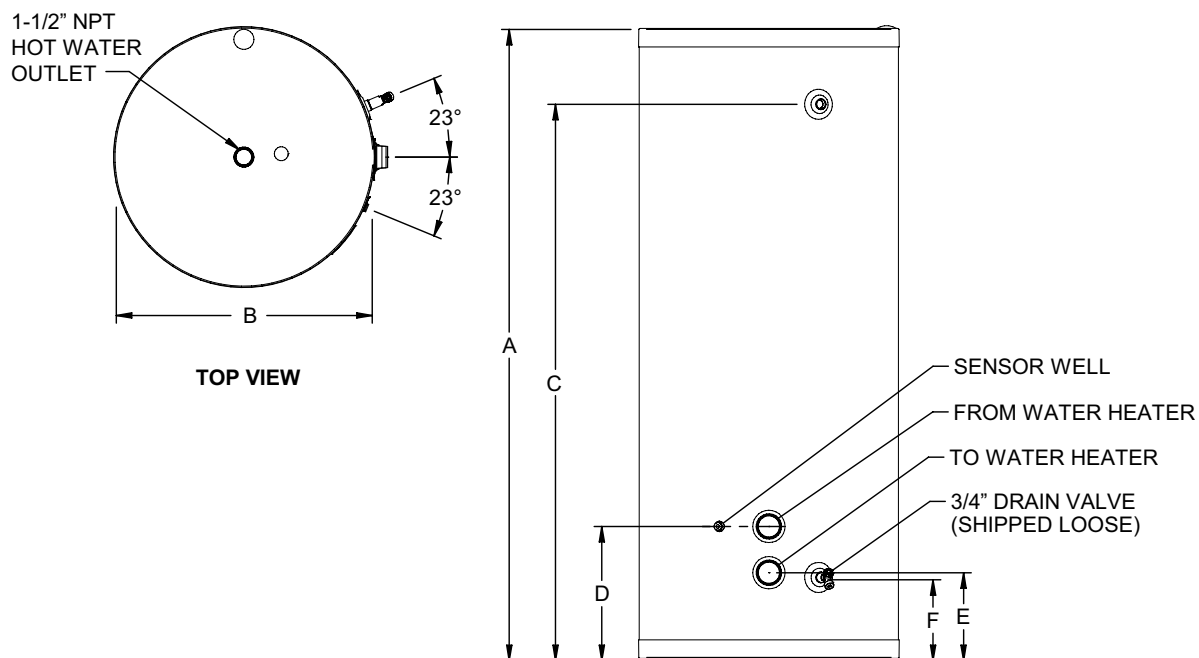

Model Number	Gallon Capacity	A	B	C	D	E	F	Recirculation Tappings	Shipping Wt. (lbs.)
SJS060	60	36"	28"	28"	14-1/4"	9-1/4"	9"	1-1/2"	138
SJS080	80	69-1/2"	24"	61-3/4"	14-1/2"	9-1/2"	9"	2"	153
SJS119	119	68-1/4"	28"	60-1/4"	14-1/2"	9-1/2"	9"	2"	198



Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000
f in v @ Lochinvar.com