



Lochinvar®

— VERTICAL — CUSTOM STORAGE TANK

QUOTE REQUEST FORM & DRAWING

FILL FORM COMPLETELY FOR TIMELY PROCESSING OF RFQ (REQUEST FOR QUOTE).

Company Name:

Job Name/Location:

NOTES & SPECIAL REQUIREMENTS:

Contact Person:

Order/PO #:

Contact Phone:

BASE MODEL
(FROM SUBMITTAL):

CAPACITY (Gals.):

MAX. PRESSURE (PSI):

125

150

Contact Email:

ADDITIONAL SPECIFICATIONS

TANK LINING:

UNLINED GLASS CEMENT

SURFACE:

JACKETED BARE FOAM 2"/R12.5
3"/R16

SPACE RESTRICTIONS (MAX. INCHES) –

HEIGHT: WIDTH: DEPTH:

AVAILABLE OPTIONS:

MANWAY (12x16)

(For 30" and 36" dia. only,
Std. on 42" dia. tanks & up.)

Y

N

4x6 HAND-HOLE

Y

N

T&P GAUGE

(Foam, Bare, or RJ Tanks)

Y

N

GAUGE(S)

(For Jacketed Tanks Only)

TEMP.

PRES.

SUPER BULBWELL

Y

N

LIFTING LUGS (PAIR)

(Indicate only for Jacketed Tanks,
Lugs are Std. on Foam or Bare)

Y

N

ADDITIONAL BAFFLE

Y

N

SEISMIC BRACING

Y

N

SPEC. ATTACHED

Y

N



BASIC CONNECTIONS (SHOWN)

ITEM	DESC.	CK if STD	OR	ENTER CUSTOM SIZE	CONN. TYPE
A	OUTLET		OR		NPT FLG
B	RECIRC'S		OR		NPT FLG
C	T&P RELIEF VALVE		OR		NPT CPLG
D	AQUASTAT		OR		NPT FLG
E	DRAIN		OR		NPT FLG

Use Notes field above for customization instructions if needed.

ADDITIONAL CONNECTIONS

QTY	SIZE	ANGLE	HEIGHT FROM FLOOR	CONNECTION TYPE
				NPT FLG
				NPT FLG
				NPT FLG
				NPT FLG
				NPT FLG




NPT - Threaded

FLG - Bolted

Angles provided to assist with
custom connection location(s).

Indicate height from floor in
space provided at bottom left.

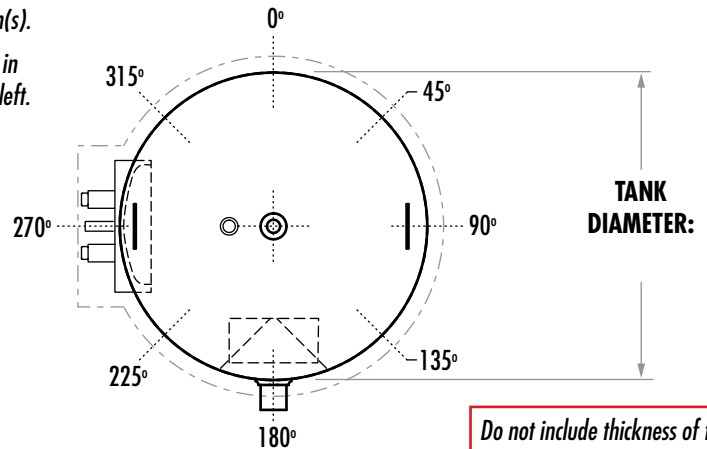

Do not include thickness of foam
or jacketing when specifying
Tank Diameter and Height.
(DIMENSIONS NEEDED ONLY IF
BASE MODEL IS NOT USED.)

