



Lochinvar®

— HORIZONTAL — CUSTOM STORAGE TANK

QUOTE REQUEST FORM & DRAWING

FILL FORM COMPLETELY FOR TIMELY PROCESSING OF RFQ (REQUEST FOR QUOTE).

Company Name:

Job Name/Location:

NOTES & SPECIAL REQUIREMENTS:

Contact Person:

Order/PO #:

Contact Phone:

BASE MODEL
(FROM SUBMITTAL):

CAPACITY (Gals.):

MAX. PRESSURE (PSI):

125 150

Contact Email:

ADDITIONAL SPECIFICATIONS

TANK LINING:

UNLINED GLASS CEMENT

SURFACE:

JACKETED BARE FOAM 2"/R12.5
3"/R16

SPACE RESTRICTIONS (MAX. INCHES) –

HEIGHT: WIDTH: DEPTH:

AVAILABLE OPTIONS:

MANWAY (12x16) (For 30" and 36" dia. only, Std. on 42" dia. tanks & up.)	Y	N
4x6 HAND-HOLE	Y	N
T&P GAUGE (Foam, Bare, or RJ Tanks)	Y	N
GAUGE(S) (Jacketed Tanks)	TEMP.	PRES.
SUPER BULBWELL	Y	N
LIFTING LUGS (PAIR) (Indicate only for Jacketed Tanks, Lugs are Std. on Foam or Bare)	Y	N
ADDITIONAL BAFFLE	Y	N
TANK SADDLES/LEGS ← Check for factory mount	Y	N
SEISMIC BRACING	Y	N
SPEC. ATTACHED	Y	N

BASIC CONNECTIONS (SHOWN)

ITEM	DESC.	CK IF STD	OR	ENTER CUSTOM SIZE	CONN. TYPE
A	OUTLET	OR			NPT FLG
B	RECIRC'S	OR			NPT FLG
C	T&P RELIEF VALVE	OR			NPT CPLG
D	AQUASTAT	OR			NPT FLG
E	DRAIN	OR			NPT FLG


Use Notes field above for customization instructions if needed.

ADDITIONAL CONNECTIONS



QTY	SIZE	ANGLE	LENGTH FROM END	CONNECTION TYPE
				NPT FLG
				NPT FLG
				NPT FLG
				NPT FLG
				NPT FLG



NPT - Threaded



FLG - Bolted

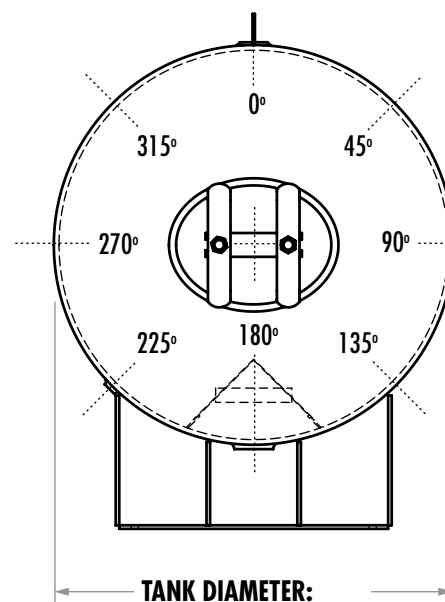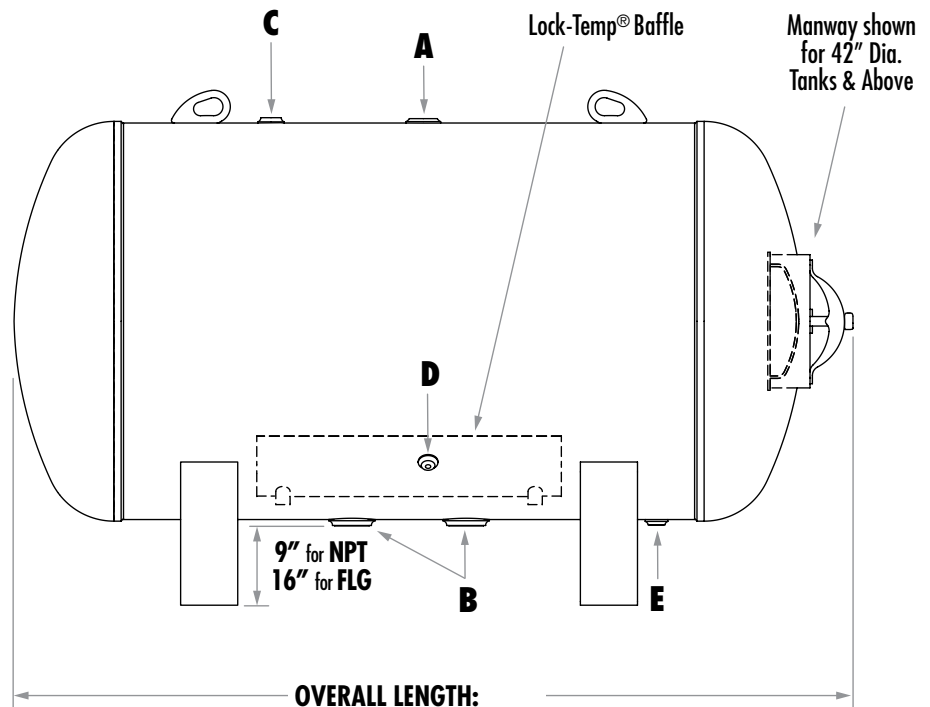

Do not include thickness of foam
or jacketing when specifying
Tank Diameter and Length.
(DIMENSIONS NEEDED ONLY WHEN
BASE MODEL IS NOT USED.)

END
VIEW

Angles provided to assist with
custom connection location(s).
Indicate length from closed end
in space provided at left.