



Lochinvar®

LIGHT SERVICE COMMERCIAL ELECTRIC WATER HEATER

Submittal Sheet

CLS-Sub-02

Job Name:

Model No.:

Capacity (gal.):

Location:

Voltage/Phase:

Recovery Rate in GPH @ F° Rise:

Engineer:

KW:

Equipment Tag(s):



Agent/Wholesaler:

Contractor:

NOTES:

Standard Equipment:

- Non-Simultaneous or Simultaneous Wiring
- Glass-Lined Steel Tank
- Non-CFC Foam Insulation
- Adjustable Thermostats
- Automatic Overheat Protection
- Tank Saver Anode
- ASME Temperature & Pressure Relief Valve
- 6 Year Limited Tank Warranty, 1 Year Limited Parts Warranty (See warranty for details)

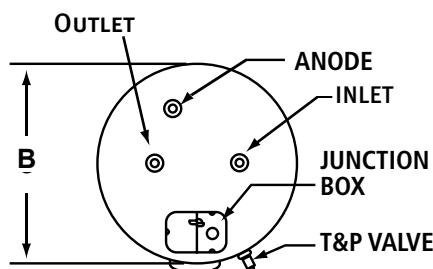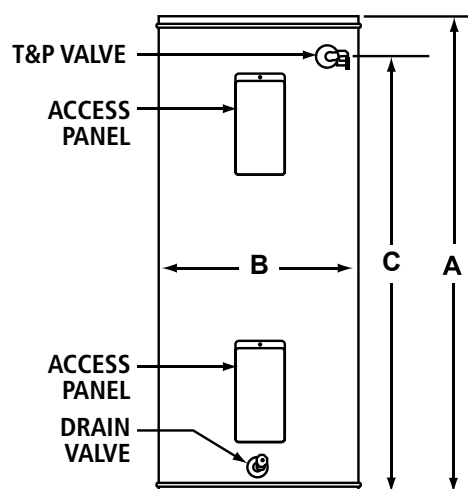

For Ease in Ordering by Model Number

E	T	A	082	K	D
MODEL	TALL	VOLTAGE	TANK CAPACITY	WATTAGE	ELEMENT QUANTITY

This is a Tall Commercial Electric 240 volt model with a tank capacity of 80 gallons. The upper and lower elements are 4500 watts.



Model Number	Gallon Capacity	A	B	C	Shipping Weight
Tall Models					
ETA066KD	66	60-1/4"	22"	53"	146
ETA082KD	80	60-1/2"	24"	52-1/4"	175
ETA119KD	119	61-1/2"	28"	54-1/2"	268

Note: 3/4" water connections on 8" center

VOLTAGE SCHEDULE		
J	208V	1 PH
A	240V	1 PH
T	208V	1 PH (Simultaneous)
P	240V	1 PH (Simultaneous)

Element	Wattage	RECOVERY RATE (GPH @ °F Rise)			
		40°F	70°F	100°F	130°F
C	1500	16	9	6	5
E	2000	21	12	8	6
F	2500	26	15	10	8
G	3000	31	18	12	10
H	3500	36	21	14	11
J	4000	41	24	17	13
K	4500	47	27	19	14
M	5000	52	30	21	16
N	5500	57	32	23	17

Note: Double the value for simultaneous models.

Simultaneous & Non-Simultaneous ELEMENT SCHEDULE		
Wattage	208V	240V
C 1500	Yes	Yes
E 2000	Yes	Yes
F 2500	Yes	Yes
G 3000	Yes	Yes
H 3500	Yes	Yes
J 4000	Yes	Yes
K 4500	Yes	Yes
M 5000	Yes	Yes
N 5500	N/A	Yes