



Lochinvar®

LOCK-TEMP® SQUARE JACKETED TANK

Submittal Sheet

TSJ-Sub-10

LOCK-TEMP® SQUARE JACKETED STORAGE TANK

Job Name: _____

Location: _____

Engineer: _____

Agent/Wholesaler: _____

Contractor: _____

Model Number: _____

Tank Construction: _____
Vertical Horizontal

Tank Lining: _____
Glass Cement

Equipment Tag(s): _____

Gallon Capacity: _____

Working Pressure: _____

Tank Height: _____ Tank Dia.: _____

NOTES:

Standard Features


- Five-Year Limited Warranty (See warranty for details)
- Lock-Temp Baffle
- Magnesium Anode
- ASME Certified, "HLW" Stamped
- 125 Working Pressure

Optional Tank Linings

Glass Lined
Cement Lined

Optional Equipment

150 psi Working Pressure
Temperature and Pressure Gauge
Handhole (4"x 6")
Lifting Lugs
Manway (Optional on 34" and 40" diameter only)
125 psi Temperature and Pressure Relief Valve
150 psi Temperature and Pressure Relief Valve

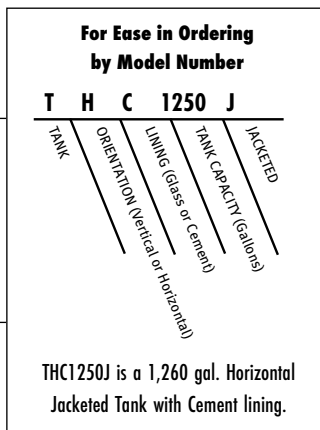


Lock-Temp® Square Jacketed Storage Tanks Dimensions & Specifications

VERTICAL MODELS


MODEL NO.	GAL. CAP.	A	B	C	D
TV*1250J	1250	132-1/2"	60-1/2"	21-1/4"	29-1/4"
TV*1500J	1500	128-1/2"	66-1/2"	25-3/4"	31-3/4"
TV*2000J	2000	124-1/2"	78-1/2"	28-1/4"	35-1/2"
TV*2500J	2500	146-1/2"	82-1/2"	28-1/4"	35-1/4"

MODEL NO.	SHIPPING WEIGHTS:	
	125 PSI	150 PSI
TV*1250J	2,877	3,094
TV*1500J	3,336	3,587
TV*2000J	3,525	3,790
TV*2500J	4,668	5,020

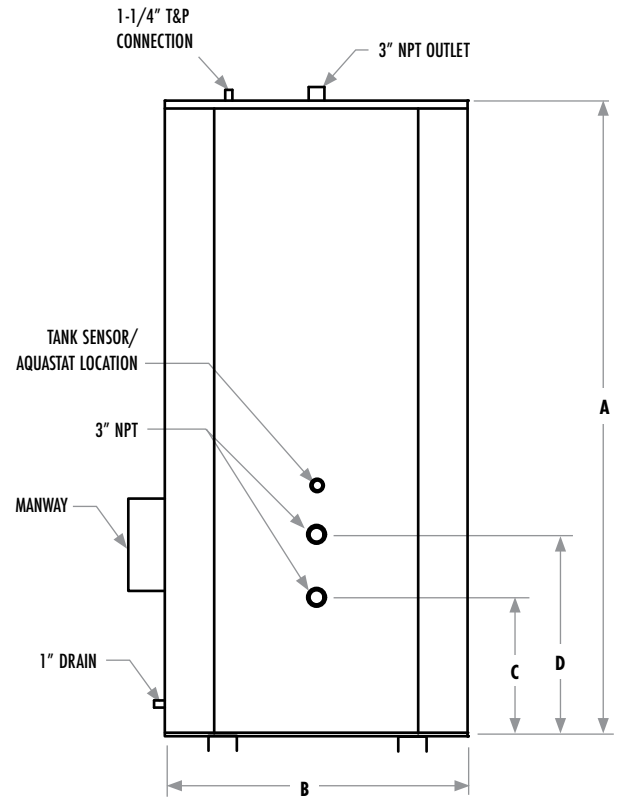

* in model number is used to indicate tank lining. Use G=Glass lined; C=Cement lined

HORIZONTAL MODELS

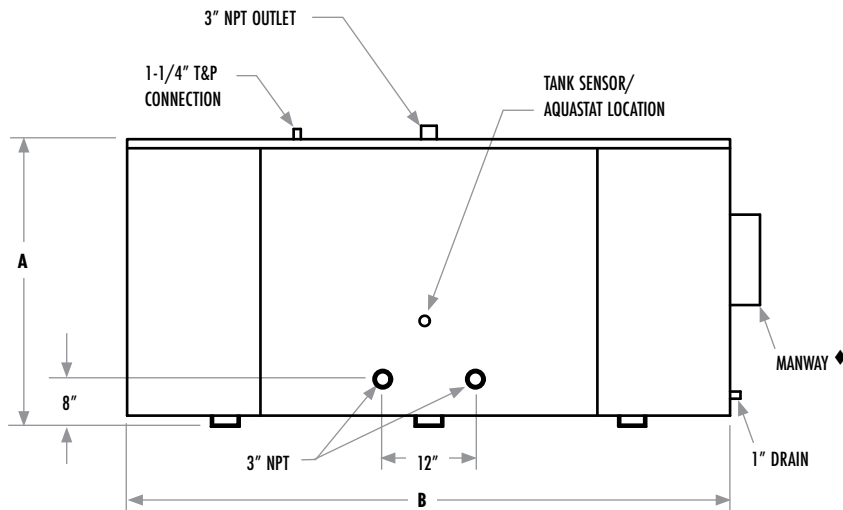

MODEL NUMBER	GALLON CAPACITY	A	B	DEPTH	SHIPPING WEIGHT	
					125 PSI	150 PSI
TH*1250J	1250	68-1/2"	130-1/4"	60-1/4"	3,270	3,516
TH*1500J	1500	74 1/2"	126-1/4"	66-1/4"	3,791	4,077
TH*2000J	2000	80-1/2"	123-1/4"	72-1/4"	4,005	4,307
TH*2500J	2500	86-1/2"	144-1/4"	78-1/4"	5,306	5,705



Lochinvar, LLC
 300 Maddox Simpson Parkway
 Lebanon, Tennessee 37090
 P: 615.889.8900 / F: 615.547.1000
 Lochinvar.com