



Lochinvar®

HIGH EFFICIENCY BOILERS & WATER HEATERS

ANTI-FREEZE VALVE

Submittal Sheet

AFV-Sub-01

Anti-Freeze Valve

Job Name: _____

Location: _____

Engineer: _____

Agent/Wholesaler: _____

Contractor: _____




Equipment Tag(s): _____

ANTI-FREEZE VALVE

MATERIAL NUMBER

100389076

NOTES:

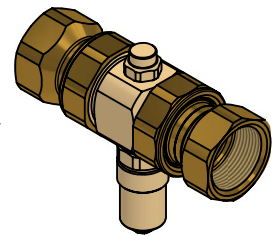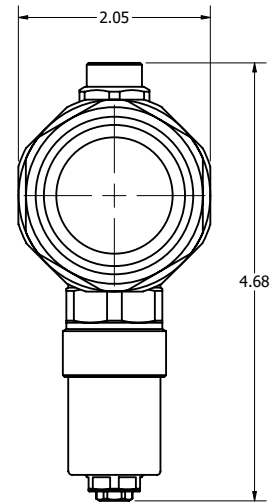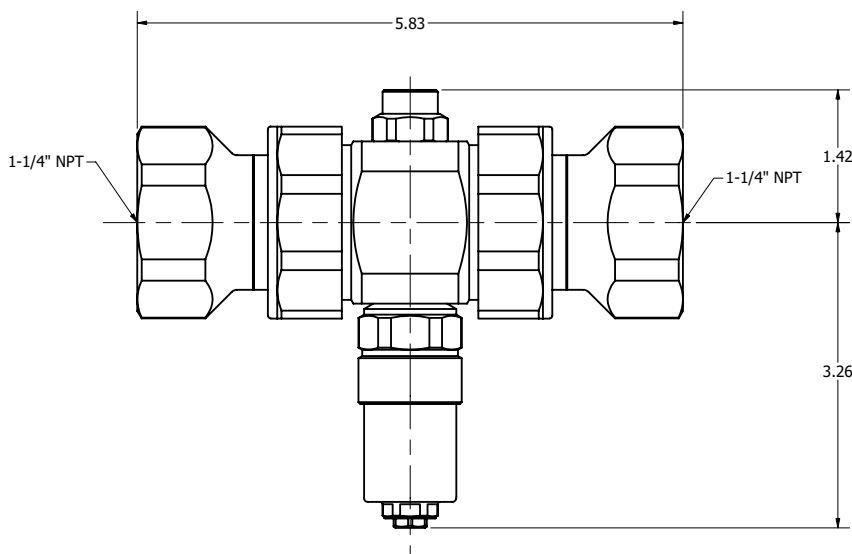


- Opens below 37.4°F water temperature.
- Keep a minimum installation distance of 6 inches to the ground.
- Protects water system in case of power loss,
- Always installed in the lower part of the piping, avoiding water traps.
- Always 2 valves, one per pipe.
- Always install in vertical position.

Please note:

Due to functionality the anti-freeze valve must be installed outdoors.

Application Diagram

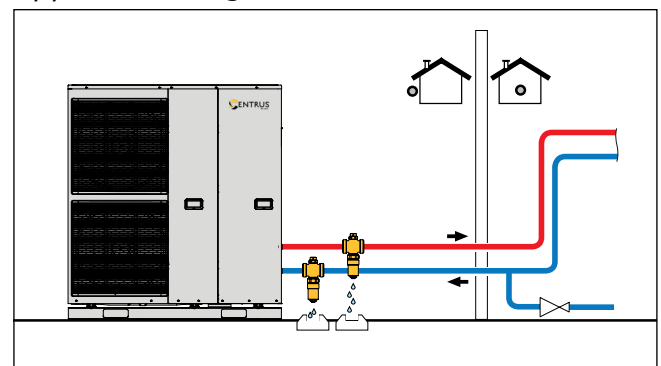

Lochinvar®

HIGH EFFICIENCY BOILERS & WATER HEATERS

Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000

Lochinvar.com