

COMMERCIAL WATER HEATERS

Lochinvar's Commercial Light Duty Heat Pump electric water heater is up to 4 times more efficient and delivers more hot water than standard electric water heaters with its innovative smart valve technology.

COMMERCIAL LIGHT DUTY ELECTRIC HEAT PUMP

STANDARD FEATURES

HEAT PUMP – Absorbs ambient heat from the surrounding air to heat water using a compressor. The self-contained heat pump is integrated into the top of the tank. Backup electric elements supplement the heat pump depending on operating mode, environmental conditions and hot water demand. Providing improved efficiency up to 3.88 Uniform Energy Factor (UEF), the heat pump works to a low of 37°F ambient for more days of high efficiency operation.

MULTIPLE OPERATING MODES - Choose from multiple modes to match water heating needs and environmental conditions. Three HotWater+ levels to choose from for up to 40% more hot water than a standard heat pump.

- Use HotWater+ in conjunction with other modes to customize the amount of hot water for daily operations.
- Hybrid (default) delivers hot water balanced with energy saving performance
- Heat Pump provides maximum energy efficiency

Use HotWater+ with temporary modes:

- Guest: Provides maximum hot water for up to seven days
- Electric: Uses only the electric heating elements
- Vacation: Reduce energy use while you are away

LEAK PROTECTION TECHNOLOGY - The smart anode adapts to water conditions, protecting and extending the life of the water heater. Controls regulate depletion of the anode, extending life, while allowing superior tank protection to standard anode rods. Notification is sent when the anode needs to be replaced. The smart sensor leak detection and automatic water shutoff enhance protection and provide peace of mind.

QUIET OPERATION - 45 dBA. (no vibration isolation kit required)

FLEXIBLE DESIGN -Top water connections. Zero clearance required on sides and back to fit smaller spaces. Only 450 ft³ of space required, plus integrated ducting adapters for easy installation in tight spaces.

3-YEAR LIMITED WARRANTY– See written warranty for complete information. Also found on Lochinvar.com.



Qualifies for many state and local utility rebates - check Lochinvar.com



Lochinvar®
HIGH EFFICIENCY BOILERS & WATER HEATERS

DIMENSIONS AND SPECIFICATIONS

COMMERCIAL HEAT PUMP ELECTRIC MODELS							DIMENSIONS AND SPECIFICATIONS							
Model Number	Nominal Capacity	Rated Storage Volume	UEF	COP*	First Hour Rating (gal.)	Recovery in GPH 90°F Rise	A	B	C	D	E	F	G	Approx Ship. Wt. (lbs.)
CHPA040	40	36	3.60	4.16	55	28	64-3/4"	20"	41-1/2"	3-3/4"	8"	43-1/2"	46-1/2"	191
CHPA050	50	46	3.68	4.07	65	28	63"	22"	41-1/2"	3-3/4"	8"	43-1/2"	48"	196
CHPA066	66	68	3.84	4.10	83	28	61-1/2"	26-1/2"	38-1/4"	4"	8"	41-1/4"	46"	284
CHPA080	80	81	3.88	4.05	95	28	69"	26-1/2"	46-1/2"	4"	8"	50-1/2"	54-1/2"	302

*COP tested in Heat Pump only mode at 240V, 67°F, and 50% Relative Humidity. 208V operation will result in derated outputs.

ADVANCED QUALIFICATIONS

ASSE 1082
California Title 24 JA13 Qualified
CTA-2045 (AC)
ENERGY STAR®
HUD Compliant
NEEA Tier 4
Open ADR 2.0b VEN
Utility Demand Response Advanced Load-up Capable


OTHER FEATURES

Easily accessible front mounted junction box
R-134a Refrigerant
Environmentally-friendly, non-CFC foam insulation
Durable, enhanced-flow brass drain valve
CSA certified and ASME rated temperature & pressure relief valve

OPERATING REQUIREMENTS

Requires provision for non-acidic condensate draining; if a suitable drain is not available a condensate pump is required.
208/240 VAC 60Hz single phase 30 amp power supply

iCOMM SMART CONNECTIVITY - Download the free iComm™ app to get started

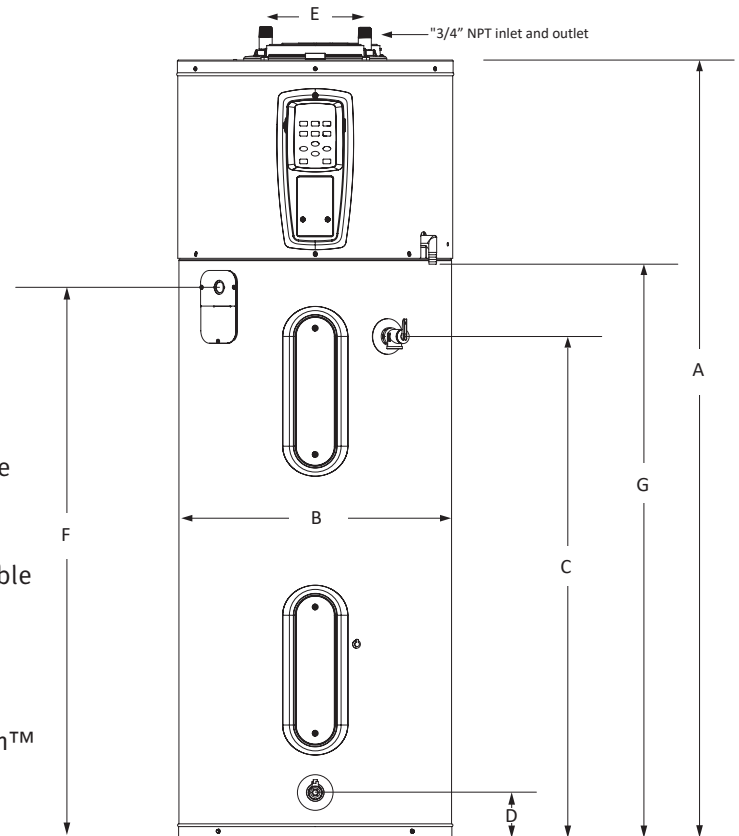

For technical information call 800-722-2101. Lochinvar, LLC reserves the right to make product changes or improvements without prior notice.



Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000
Lochinvar.com

