



Lochinvar®

OUTDOOR HEAT PUMP STORAGE TANK

Submittal Sheet

HPTO-Sub-02

OUTDOOR THERMAL-STOR STORAGE TANK

Job Name: _____

Model No. _____

Location: _____

Gal. Capacity: _____

Engineer: _____

Equipment Tag(s): _____

Agent/Wholesaler: _____

Contractor: _____


NOTES:

Model Number	Rated Capacity (Gal)	A	B	C	D	E	Shipping Weight
HP150-0	150	93-1/4"	32"	89-1/4"	55-5/8"	16-1/8"	785
HP250-0	250	92"	38"	92"	53"	17-1/2"	1180
HP500-0	450	96"	50"	92"	59-1/5"	21"	1726
HP750-0	650	134"	50"	130-1/4"	76-1/4"	22-3/4"	1726
HP1000-0	850	135"	56"	131-1/4"	76-1/2"	24-3/4"	3458

*Note: Standard Construction Only - Options not available.

STANDARD FEATURES

Patent pending baffle design
Industry leading water stratification
95% Drawdown
Single Pass application
125 PSI Working Pressure
12" x 16" Manway
Glass Lining
R22 Insulation
3" NPT Connections
2" NPT Return Connection
Lifting Lugs
"Seismic Rated (Condition 5, Ground Level)"
Ten-Year Limited Warranty (See warranty for details)

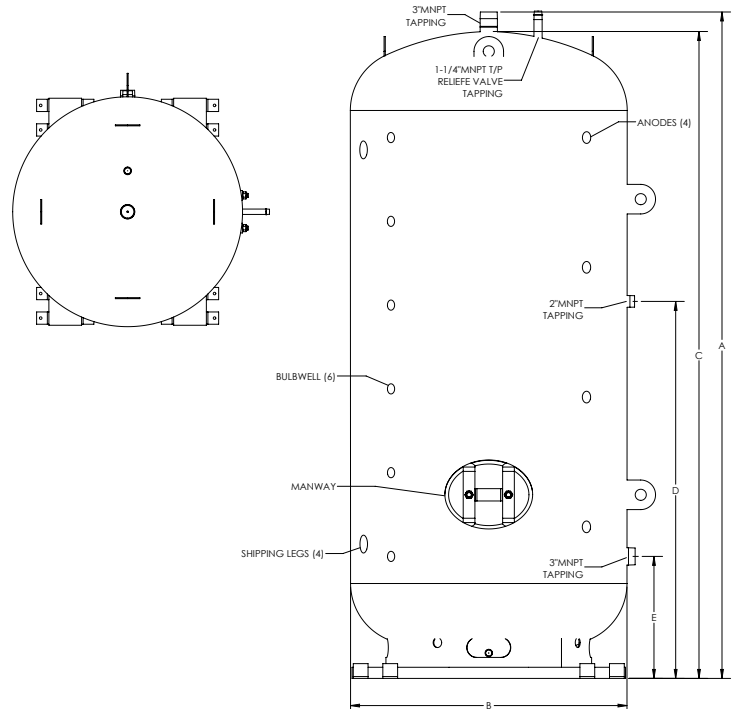

Lochinvar, LLC
300 Maddox Simpson Parkway
Lebanon, Tennessee 37090
P: 615.889.8900 / F: 615.547.1000
f t i n Lochinvar.com



LOW LEAD CONTENT



HLW