

AIR SOURCE HEAT PUMP WATER HEATER

HIGH COEFFICIENT OF PERFORMANCE (COP) UP TO 4.61

OPERATES EFFICIENTLY IN TEMPERATURES AS LOW AS 23°F

MODULAR DESIGN CONCEPT

LOW GLOBAL WARMING POTENTIAL (GWP) REFRIGERANT (R513A)

TWO VOLTAGES: 440-480V OR 208V 3PH 60 HZ

PACKAGE SOLUTIONS AVAILABLE

FEATURES REMOTE MOUNTABLE  **SMART TOUCH™** CONTROL SYSTEM



DESIGNED ★ ENGINEERED ★ ASSEMBLED

USA

 **Lochinvar®**

A DIFFERENCE MAKER


By absorbing the maximum amount of energy from the ambient air and efficiently passing that energy to the water, Veritus provides hot water using the least amount of electricity possible, boasting a high coefficient of performance (COP) throughout the operating range. A high COP coupled with a low global warming potential (GWP) refrigerant (R513A) makes Veritus the best choice for a wide variety of commercial water heating applications. Its superior performance effectively reduces carbon output and enhances greenhouse gas reduction efforts.

Lochinvar has a history of new product development in high efficiency water heating equipment. We have continuously invested in cutting edge technology and product development facilities. To support the Veritus heat pump water heater development, Lochinvar installed environmental chambers to verify heat pump performance in a variety of external temperatures and humidity levels. This investment allows us to confirm our full operational range and provide accurate and credible product data.



Environmental chamber can be adjusted from -5°F to 140°F

AHP PERFORMANCE

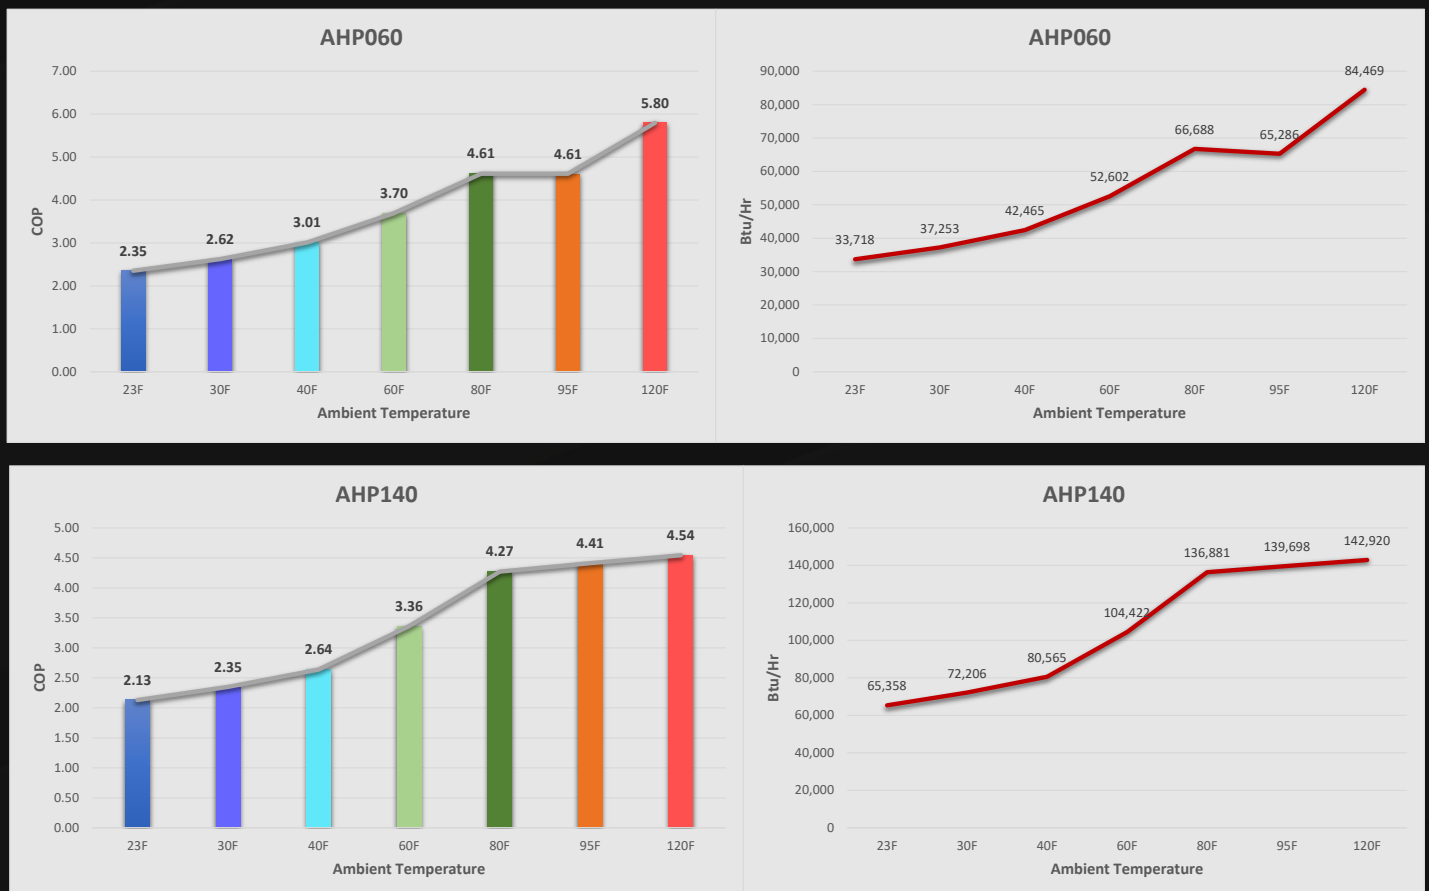

Performance varies per model, please reference individual unit performance tables/charts when sizing your system.
Performance based on test points from the DOE and AHRI 1300 Test Standards


VERITUS FEATURES



2 EVAPORATOR
COPPER TUBING WITH
ALUMINUM FINS
Ambient air is pulled
over the coil and heat is
absorbed into the
refrigeration system.

4 COMPRESSOR
RELIABLE SCROLL
TECHNOLOGY
Pushes refrigerant to the
center of one stationary
scroll and one orbiting
scroll, compressing it.

5 REVERSING VALVE
QUICK DEFROST
Defrost is required when the heat pump is operating
in lower ambient conditions and high humidity. The
quicker the defrost, the more time the unit can be
producing hot water.



1 EVAPORATOR FAN
ECM and variable speed.
Fan changes speed as
required to control outlet
water temperature.

3 CONDENSER
STAINLESS STEEL,
DOUBLE-WALL
Heat from the
refrigeration cycle is
transferred into the
domestic hot water.

PUMP
ECM AND VARIABLE SPEED
The speed of the pump changes
to control the delivery of water
to the storage tanks at the
required temperature.



EASE OF INSTALLATION

Another feature that Lochinvar keeps top-of-mind is product footprint and ease of installation including flexible voltage sizes with either 440-480v or 208v. The Veritus heat pump water heater has a modular design making size selection and transport easy. Shipped separately, single Veritus units can be installed for smaller hot water output or manifolded together for larger application demands. When installing, the models can be moved via freight elevators due to their individual size and weight.

Providing further flexibility, the Veritus heat pump water heaters can be located outside the facility, such as on a rooftop, while keeping ancillary equipment like storage tanks located inside the mechanical room or other indoor location.



AHP 280 with three Thermal-Stor HP750G tanks. Control panel mounted on the wall.



The control panel featuring the SMART TOUCH™ control can be removed from the unit and installed in an entirely different location, allowing it to be easily adjusted and monitored.

SMART TOUCH FEATURES

BACKUP ENABLE – Control a back-up source with an Enable Contact or a 0-10V signal. Pipe a back-up source in parallel with the heat pump or in series with storage tanks.

ALARM CONTACT – Sends notifications to off-site locations when faults occur or connect to a Building Management System.

CASCADE WITH FLEX ADDRESSING – No more programming of control to set up cascade. Heat pump controls begin communication with control panel during initial startup.

FREEZE PROTECTION – The heat pump can enable field installed heat tape, along with energizing the pump and compressor during low ambient and water temperatures.



AHP140 with control panel mounted at unit.

A tall, grey, cylindrical Lochinvar water heater is shown against a dark background. The unit has a black rectangular label near the top with the Lochinvar logo and name. Several small, dark circular ports are visible along the side of the cylinder. A red circular inset in the lower right corner provides a close-up view of the gas valve assembly, showing a silver-colored gas valve with a flared base and a gas line connection.


A large, white, textured vertical storage tank, likely a water heater, with the Lochinvar logo prominently displayed. The tank has a circular access door near the bottom and is mounted on a black base. The background is dark and industrial.

Outdoor Thermal-Storage

VERITUS™ HEAT PUMP WATER HEATER PIPING DIAGRAMS


Veritus Heat Pump water heaters are flexible to install to meet both single pass & Multi-pass installations. Whether returning to primary source or with a hybrid system, environmentally friendly options are available for local requirements and to meet budgets. See owner & installation manual for more options or contact the factory for custom designs.

SINGLE PASS RETURN TO PRIMARY: TWO HEAT PUMPS, TWO TANKS

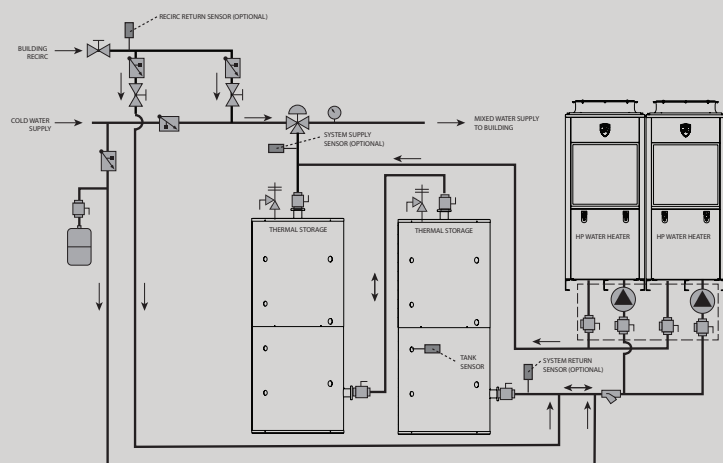


Veritus is capable of return-to-primary which allows the domestic recirculation line to be piped back to the heat pump. This eliminates the need for a swing/maintenance tank, saving installation cost, time and space.

MULTI PASS RETURN TO PRIMARY: ONE HEAT PUMP, ONE TANK

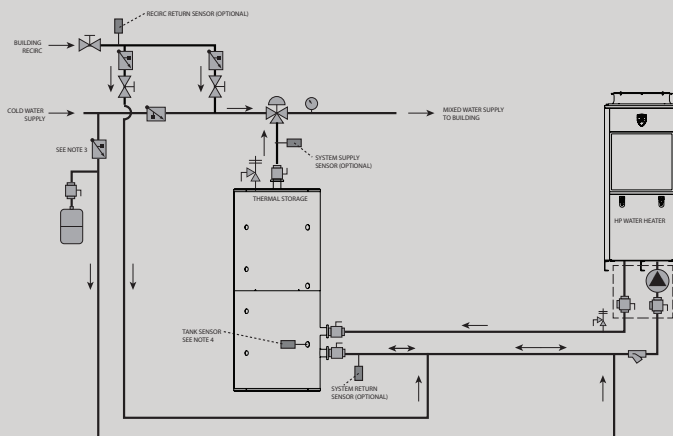

Veritus is capable of multi-pass return to primary without additional set-up or configuration. Pulling from the bottom of the tank, Veritus will control the flow to ensure the outlet temperature matches the set-point.


SINGLE PASS RETURN TO PRIMARY: TWO HEAT PUMPS, TWO TANKS, ELECTRIC BACKUP

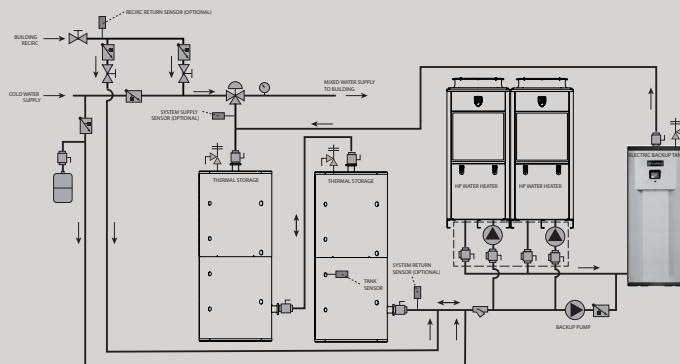

Utilizing an electric water heater could provide a back up solution with no carbon emissions. Using existing thermal storage coupled with a smaller backup water heater saves utility and installation costs.


VERITUS™ HEAT PUMP WATER HEATER DIMENSIONS AND CONFIGURATIONS

AHP200

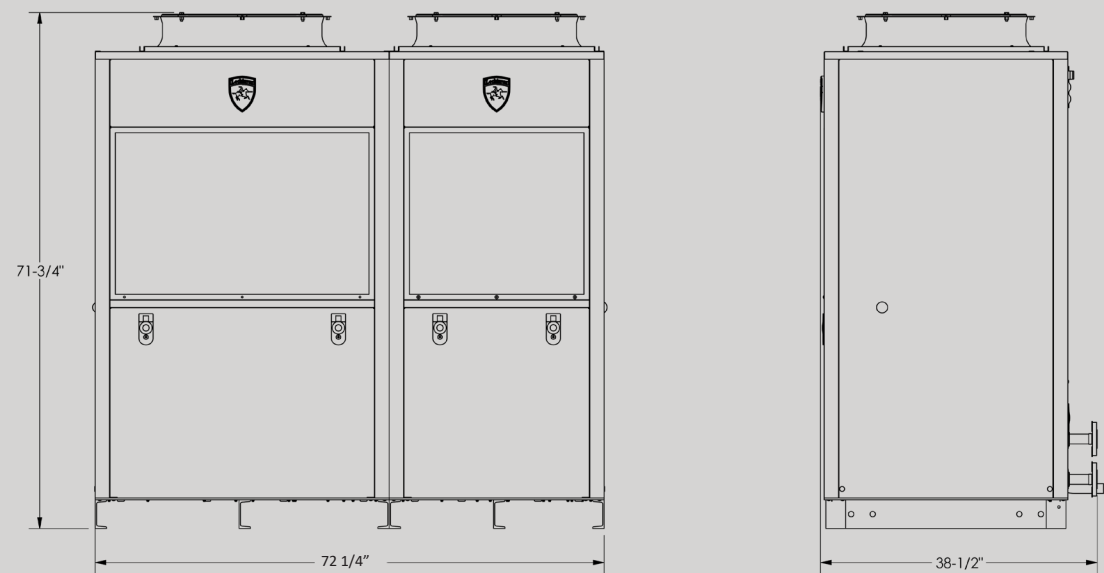


1-60 + 1-140 MODULE, MANIFOLD PANEL PACKAGED & SHIPPED SEPARATELY. CONTROL PANEL SOLD & SHIPPED SEPARATELY.

AHP280

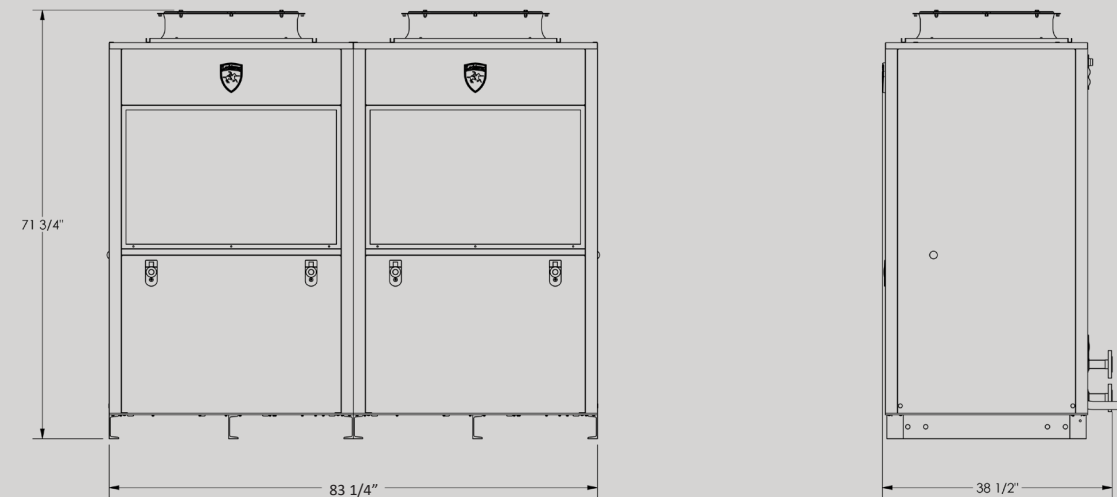

2-140 MODULES, MANIFOLD PANEL PACKAGED & SHIPPED SEPARATELY. CONTROL PANEL SOLD & SHIPPED SEPARATELY.


AHP350

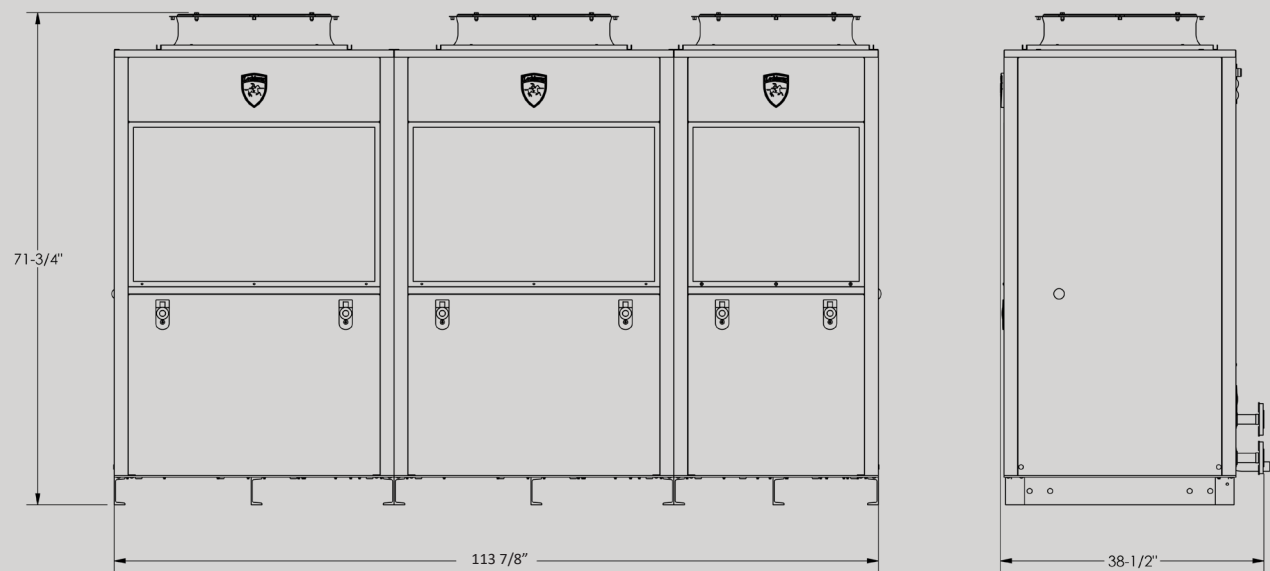

2-140 + 1-60 MODULE, MANIFOLD PANEL PACKAGED & SHIPPED SEPARATELY. CONTROL PANEL SOLD & SHIPPED SEPARATELY.

VERITUS™ HEAT PUMP WATER HEATER DIMENSIONS AND SPECIFICATIONS

AHP060, AHP140

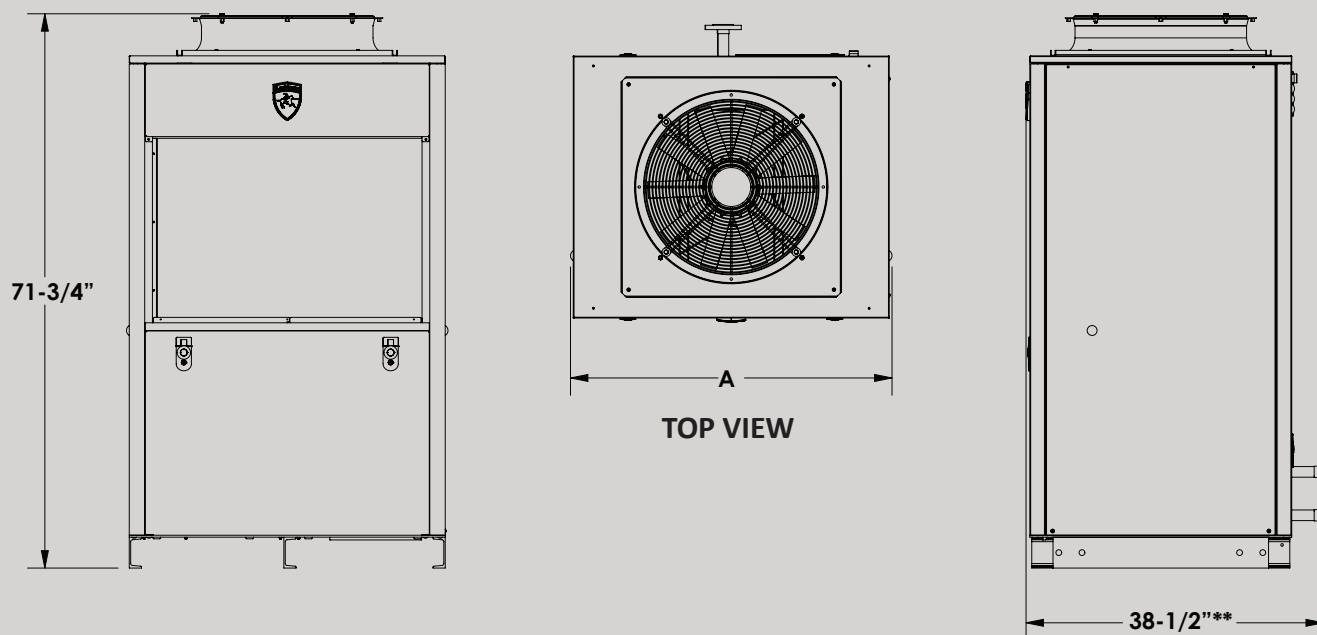

AIR SOURCE HEAT PUMP		DIMENSIONS AND SPECIFICATIONS			
Model Number*	COP*	Maximum Output BTU/Hr*	A	Shipping Weight	Total # Modules
AHP060	4.61	66,688	30-5/8"	1,155	1
AHP140	4.27	136,881	41-5/8"	1,370	1
AHP200***	4.38	203,069	72-1/4"	2,505	2 (60 + 140)***
AHP280***	4.27	272,762	83-1/4"	2,721	2 (2 x 140)***
AHP350***	4.34	339,450	113-7/8"	3,854	3 (2x 140 + 60)***

+ add -480 or -208 to model number to denote voltage

* DOE test standard, 80°F ambient with 63% humidity, inlet water temperature at 70°F, outlet water temperature at 120° F.

**The field installed piping manifold will increase the depth of the units to 63"

*** Packaged Separately (Models AHP200-350)

STANDARD FEATURES

High Efficiency COP
 ZERO On-site Emissions
 Modular Design
 480 Volt 3 Phase or 208 volt 3 Phase 60hz
 100kA SCCR
 Maximum Set-point of 160F°
 Single or Multi Pass
 Scroll Compressor (Copeland)
 Core Sense Module
 ECM Variable Speed Pump
 Electronic Expansion Valve
 Reversing Valve
 Manifold Piping Assembly** (Packaged Separately for Models AHP200-350 Only)
 1 Year Limited Warranty (See Warranty for Details)

SMART TOUCH FEATURES

Smart Touch Operating System
 - Remote Mountable - Purchased & Packaged separately,
 - Requires dedicated 120v power supply
 Building Automation Integration with 0-10 VDC Input
 Variable Speed Pump Control
 Fault Logging
 Low Voltage Terminal Strip
 Alarm Contact
 Backup Enable
 Booster Fan Contact

OPTIONAL EQUIPMENT

Single Point Electrical (Bus Panel)
 - For Models AHP 200-350 Only for both 208v or 480v
 BMS Gateway to Modbus RS485/TCP and BACnet IP/ MSTP
 Seismic brackets (1 kit needed per module)
 Coastal Coating (Field applied evaporator only)
 5 Year Optional Extended Compressor Warranty (See Warranty for Details)



Lochinvar, LLC
 300 Maddox Simpson Parkway
 Lebanon, Tennessee 37090
 P: 615.889.8900 / F: 615.547.1000
[Lochinvar.com](https://www.lochinvar.com)



208v pending